



Sales | Rental | Leasing



## PRO-6G TWF RESCUE KIT

[www.twf-tiefbautechnik.de](http://www.twf-tiefbautechnik.de)

[www.twf.at](http://www.twf.at)

OPERATING MANUAL

## ► PRO-6G TWF Shoring Kit

### Inhalt

■ 1. Introduction to system applications .....	4
■ 2. Application.....	5
■ 3. General system requirements .....	6
■ 4. System installation .....	7
■ 5. Training .....	10
■ 6. System usage.....	10
■ 7. Inspection and Maintenance.....	10
■ 8. Packaging .....	11
■ 9. Labels & Markings .....	12
■ 10. Productspecification .....	14
■ 11. Cleaning .....	14
■ 12. Copy of EC declaration of Conformity .....	15

UK  
CA **CE 2797**



The product has been tested to:

AS/NZS5532:2013

AS/NZS1891.4:2009

AS 1418.2

ANSI Z359.18:2017

and OSHA 1926.140; 1926.502


requirements.

EN795:2012

CEN/TS16415:2013

CSA Z259.15:2022


and complies with the Basic Health & Safety requirements  
of New PPE Regulation (EU) 2016/425

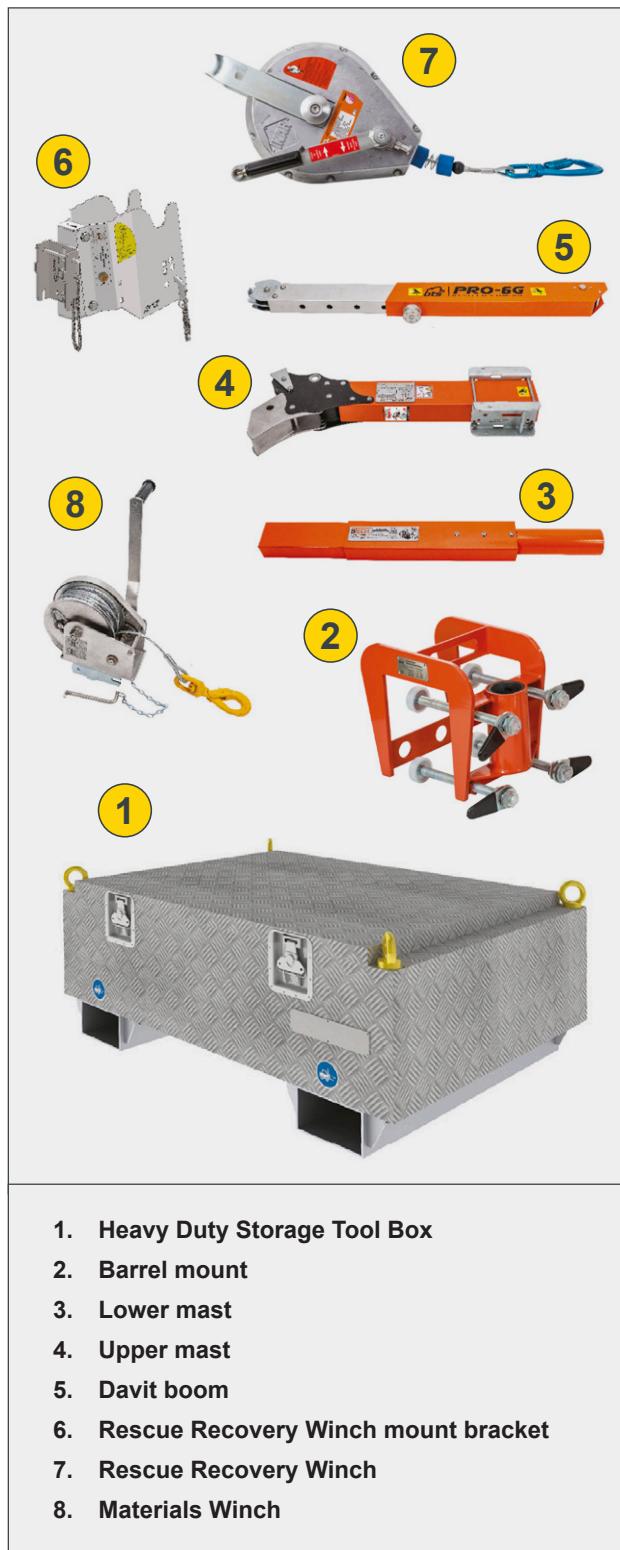



**TWF**

## ► Operating Manual

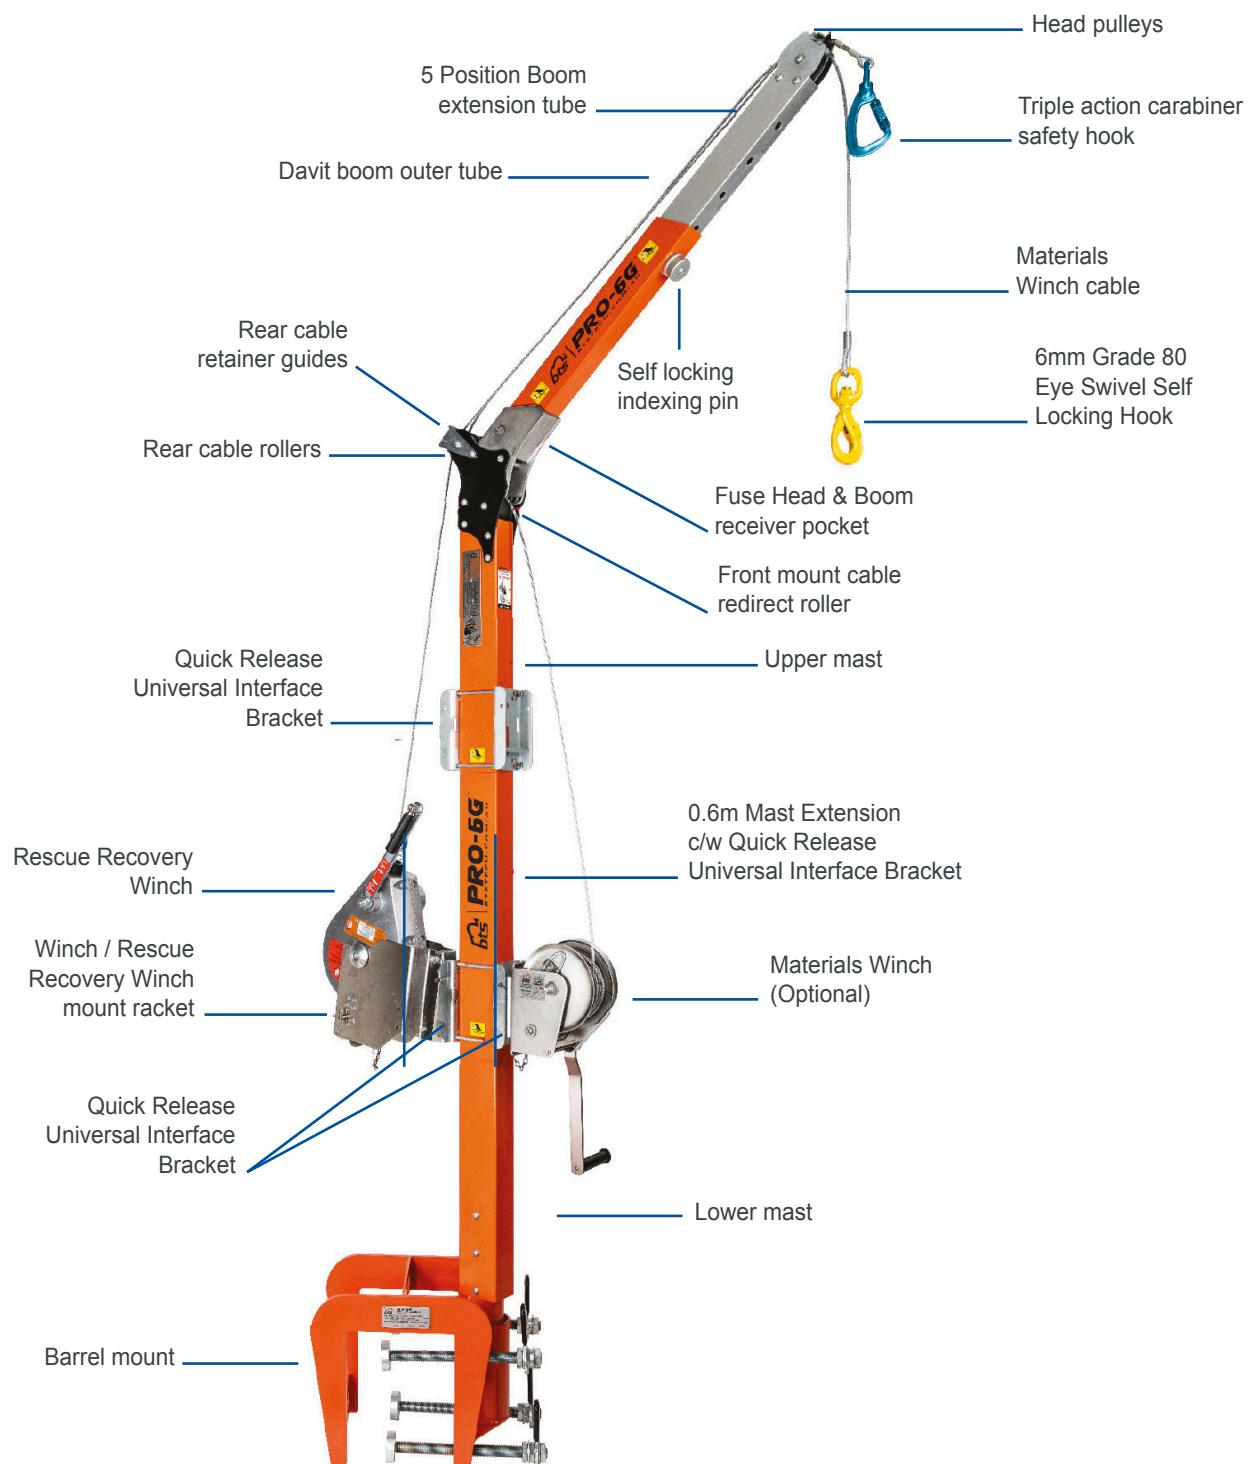

### ► PRO-6G TWF Shoring Kit

#### ■ 1. Introduction to system applications

The BTRENCHSAFE® PRO-6G Davit Shoring Kit is designed to be mounted on shoring/trench (steel or aluminium) panels to provide reliable operation in various applications at trenches and ground excavations. The Kit includes:

1. 1 x PRO-6G Davit
2. 1 x BTRENCHSAFE® Steel Adjustable Barrel Davit Mount
3. 1 x Inertia Reel 24m
4. HRA Winch mount bracket

The product has been tested to AS/NZS5532:2013, AS/NZS1891.4, ANSI Z359.18:2017 and OSHA 1926.140; 1926.502 requirements, EN795 & CEN/TS16415:2013, CSA Z259.15:2022 and complies with the Basic Health & Safety requirements of New PPE Regulation (EU) 2016/425

#### 1.1 Specification

**Working Load Limit:** 1 person weighing a maximum of 136 kg including all clothing tools and equipment connected to the HRA/Winch. The operator of the winch needs to be connected to the secondary anchor point.



#### 1.2 Safety Instructions prior to use

- Prior to using the equipment, please ensure all operating procedures have been read and understood.
- The Kit is only to be installed and used by a competent person who has been trained in safe use of the system and associated equipment and has an understanding of the dangers associated with excavations and ground collapse hazards (Guidance can be sought from Excavation and Construction Codes of Practice).
- Use appropriate personal protective equipment (PPE) during installation, operation and maintenance of the equipment.
- All non-operational bystanders are to be kept clear of work areas.
- Always wear gloves and beware of pinch points during installation and operation.
- Ask for assistance when lifting/moving heavy components. Before lifting, position body close to the load and keep back straight and knees slightly bent.

- Be aware of soft or uneven ground near the excavation site and keep work area clear of excess tools and equipment to prevent slips, trips or falls.
- Ensure all workplace OH&S requirements are identified and understood. A risk assessment complete with site specific safe work method procedure must be completed and approved by management prior to commencing the work.
- A rescue plan must be devised and be ready to be implemented prior to usage of the Kit.
- This product requires periodic inspection and maintenance by a competent person as per section 7 of this manual. The system must not be used if any part of it is overdue for service, inspection or damaged.
- Only an approved full body harness, certified to country/state or territory applicable standards and regulations, is to be used with this Kit.
- The system is designed to be used for Limited Free Fall Arrest and requires that BTS Self Retracting Lifelines (SRLs) and HRA fall Arrest Recovery Device be used. HRAs & SRLs selected for use with this system must have a Maximum Arrest Force (MAF) rating of 4kN or less.
- The PRO-6G Davit is only to be used with a compatible Davit base, capable of withstanding forces indicated in Mounting and Anchorage Strength requirements described in section 3.
- Visually inspect the product for damage prior to use. The system must not be used if there is any deterioration or deformation of any component or the structure to which the system is attached. If the Davit mast shows signs of overload or fall, immediately tag the system "Out of Service" and do not use until it has been fully inspected and recertified by a competent person.
- Persons with muscular, skeletal and physical disorders should consult a physician before using Personal Fall Protection Equipment. Increasing age or lowered physical activity may reduce a person's ability to use this equipment.
- This user manual does not in any way replace the need for completion of a recognised height safety training course.



## ► Operating Manual

### 1.3 Site Hazards

Sites have associated with them many hazards which must be considered before using any equipment or performing tasks. These include, but are not limited to:

- Overhead powerlines, transformers, underground power and solar power systems
- Gas lines (both underground and surface)
- Ground collapse hazards
- Chemicals
- Plant and machinery
- Traffic – both vehicle and pedestrian

**NOTE: Failure to follow all safety, installation, usage and maintenance instructions may result in serious injury or death.**

### ■ 2. Application

The Kit is designed to be used in various applications at ground excavation sites.

#### 2.1 Fall Protection

The PRO-6G Davit is designed to be used with the Barrel Davit mount to provide an engineered supporting structure for Personal Fall Arrest Systems (PFAS).

#### 2.2 Work Positioning

The Davit may be equipped with a material Winch or a Type 3 HRA Fall Arrest Recovery device to be used for the suspension of a worker at an elevated position for the performance of a task. The worker must wear a harness and if suspended in a work seat, a secondary personal fall arrest system must be used.

#### 2.3 Rescue

The PRO-6G Davit Arm, base and winch, may be used employed as part of a system meeting the requirements of Australian Codes of Practice for the rescue of a fallen worker/s, BS EN 1496:2006 for the rescue of a fallen worker.

#### 2.4 Confined Space Entry/Retrieval and Rescue

The PRO-6G Davit Arm, base and winch, may be used as part of a system to facilitate access to and egress from a confined space as well as non-entry rescue in the event of an emergency. When used with approved BTS mounting base and winch, the PRO-6G Davit System meets the requirements of Safe Work Australia, Confined Spaces Code of practice, EN795 & CEN/TS16415:2013, for use as a confined space entry/retrieval and rescue device.

### 2.5 Fall protection while climbing

In situations where it is not practical to install and use a permanently installed personal fall arrest system, the PRO-6G Davit and man rated winch can be used to guard against falling while climbing a ladder or other structure. The man rated winch line can be used as an extendable anchorage connector that moves up and down with the climber. An energy absorbing lanyard installed between the man rated winch line and the dorsal D-ring on the climber's full body harness absorbs fall energy and reduces the arresting forces in the event of a fall in line with current codes of practice. The man rated winch must be operated so as to continuously eliminate any slack in the man rated winch line as the climber moves up and down (length as requested). The man rated winch operator must be specifically instructed in such use of this equipment. All such installations must be designed, installed and used under the supervision of a competent person.

There are restrictions and limitations that must be carefully considered in the selection, installation and operation of this equipment.


### 2.6 Limitations

TWF recommends that any and all persons using this equipment do not work alone in case of an emergency and/or help is required.

#### MUST BE READ PRIOR TO USE:

- Only to be used by persons with documented proof of training in the use of height safety and fall protection systems.
- The B-TRENCHSAFE Davit Shoring Kit is suitable for a single user to be attached at any one time. Check system specifications or contact TWF for configuration limitations. Operator of the winch or Type 3 HRA is to be connected to the secondary anchor point on the mast.
- Users of this system must be connected via an HRA/ SRL (compliant to AS/NZS1891.3, EN360:2002), which will limit any fall to less than 600mm. The system must be set up so that the user will not be off set by more than 30 degrees from vertical.
- Do not modify any of the system components.
- System only to be used for personal fall protection equipment and not for lifting equipment/material.

### ► PRO-6G TWF Shoring Kit

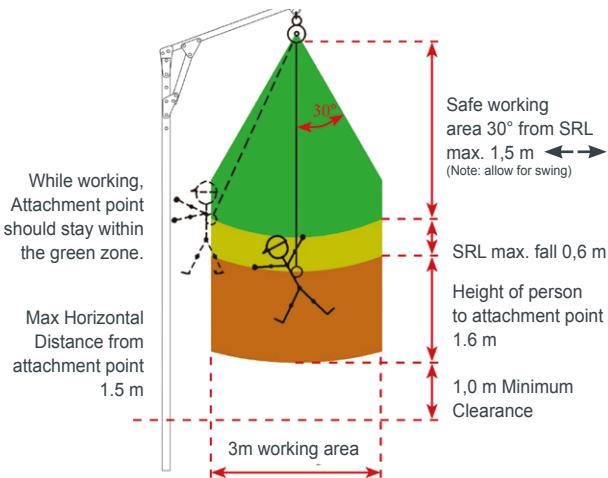

### ■ 3. General system requirements

#### 3.0 Anchor Device Maximum Loads and Deflection

- The maximum loads that could be transmitted in service from the anchor device to the structure is 4kNm in a downward direction of the jib.
- The maximum value of deflection of the anchor device is 95 mm and displacement of the anchor point that can occur in service is 10 mm.

#### 3.1 Mounting requirements

Structure selected for the installation of the Davit base must be capable of supporting a minimum of 10,000N.m moment and 22.2kN vertical load or must be approved by a Competent person so as to an appropriate safety factor for the given application(s) specified in applicable regulations.

#### 3.2 Anchorage Strength

The PRO-6G Davit Arm is designed to be set up or installed and used on a supporting surface (anchorage) capable of providing sufficient anchorage strength to support all applied loads with an acceptable margin of safety. The standards governing different situations specify various minimum requirements depending on the application, the work being performed and other factors. However, at no time shall the anchorage provide any less than the greater of:

- 2:1 safety factor on the maximum arrest force (MAF) rating of any fall arrest system being used.
- 4:1 safety factor on personnel working loads applied to the system, as defined in the specific codes of practice & standards.

All installations **MUST BE** carried out under the supervision of a Competent Person.

#### 3.3 Connectors

All connectors used to connect components in the system must be compatible with each other to ensure sufficient strength and eliminate the risk of accidental disengagement or rollout during use. Connectors supplied with products designed, manufactured and/ or approved by TWF meet all applicable requirements for connectors (refer to AS/NZS1891.1, AS/NZS1891.3 and EN 362:2004).

**Any connectors not supplied by TWF MUST BE selected and approved by a competent person.**

#### 3.4 Full Body Harness

Use only a full body harness designed, tested and approved for fall arrest (refer to AS/NZS1891.1 or EN361:2002 or equivalent to country / state or territory standards / directive or regulations) when connecting a person to this system.

Warning: Body belts or straps **MUST NOT** be used, as they do not provide adequate restraint / support to the body and may cause serious injury or death in the event of a fall.



#### 3.5 Fall Protection

Activities involving working at heights require the use of Personal Protection Equipment (PPE) to protect the worker in the event of a fall. Suitable fall protection must be provided as required by applicable local regulations when using this equipment. Fall protection equipment **MUST** be selected and installed under the supervision of a Competent Person.



## ► Operating Manual

### ■ 4. System installation

- The system can only be installed by a trained/competent person that has fully read and understood this manual. As the system is to be installed at an elevated level, on the edge of an excavation protected by a shoring system, a number of licences and qualifications may be required under site specific requirements, Local, State and Federal law. The system is only as strong as the structure/shoring box that it is mounted on; therefore, it is imperative that the shoring be installed as per the manufacturer's instructions.
- Please note that Installation records need to be kept and maintained by the user for future installations and inspections. This record must include information such as details of the installer, the address and location of installation, product identification and procedures and/or product or tools used for the installation. This document must be signed off by the installer. For further details, please refer to AS/NZS1891.4 Section 9.10 or Annex A.2 of EN795:2012
- Inspect the components for wear and damage that may have been sustained either in use or during transport. If any of the components are damaged or deemed unfit for purpose, tag them "Out of Service" and contact your supervisor prior to commencing installation.


- Before mounting the B-TRENCHSAFE PRO-6G Davit Shoring Kit, ensure that the shoring has been installed as per the manufacturer's instructions. At this point check also that the soil around the shoring box is stable (look for fissures, cracks, signs of water, services or previous excavations) and make an assessment of the potential for ground collapse. If there is any doubt as to whether it is safe to proceed, seek the guidance of a suitably qualified person.

**Note: Person installing the product may require to be connected to a separate fall arrest device if exposed to fall hazards.**

1. Install the Barrel Mount over an approved supporting structure. Tighten the clamp screws to 65 Nm or as deemed tight enough by a competent person using the integral handles provided. Do not use larger tools or any kind of an extension on these handles.
2. Install the Davit into the Barrel Mount base.
3. Adjust the offset of the davit as required by turning & pulling the self indexing pin knob, sliding the Boom extension tube to the required position and then releasing the knob to lock boom extension in any of 5 positions. Install the Winch and/or SRL as per Winch/SRL's operator manual provided.

### Quick Setup Guide

#### Davit assembly NO mast extension

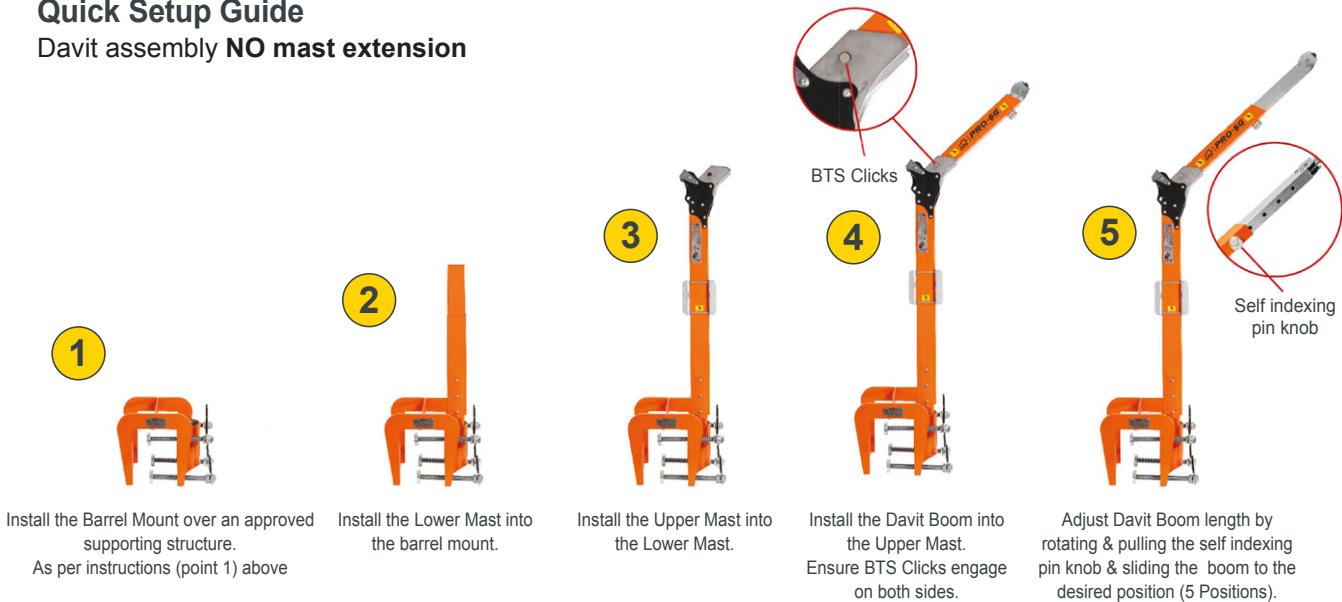

Install the Barrel Mount over an approved supporting structure.  
As per instructions (point 1) above

Install the Lower Mast into the barrel mount.

Install the Upper Mast into the Lower Mast.

Install the Davit Boom into the Upper Mast.  
Ensure BTS Clicks engage on both sides.


Adjust Davit Boom length by rotating & pulling the self indexing pin knob & sliding the boom to the desired position (5 Positions).



## ► PRO-6G TWF Shoring Kit


### Quick Setup Guide

Davit assembly with mast extension

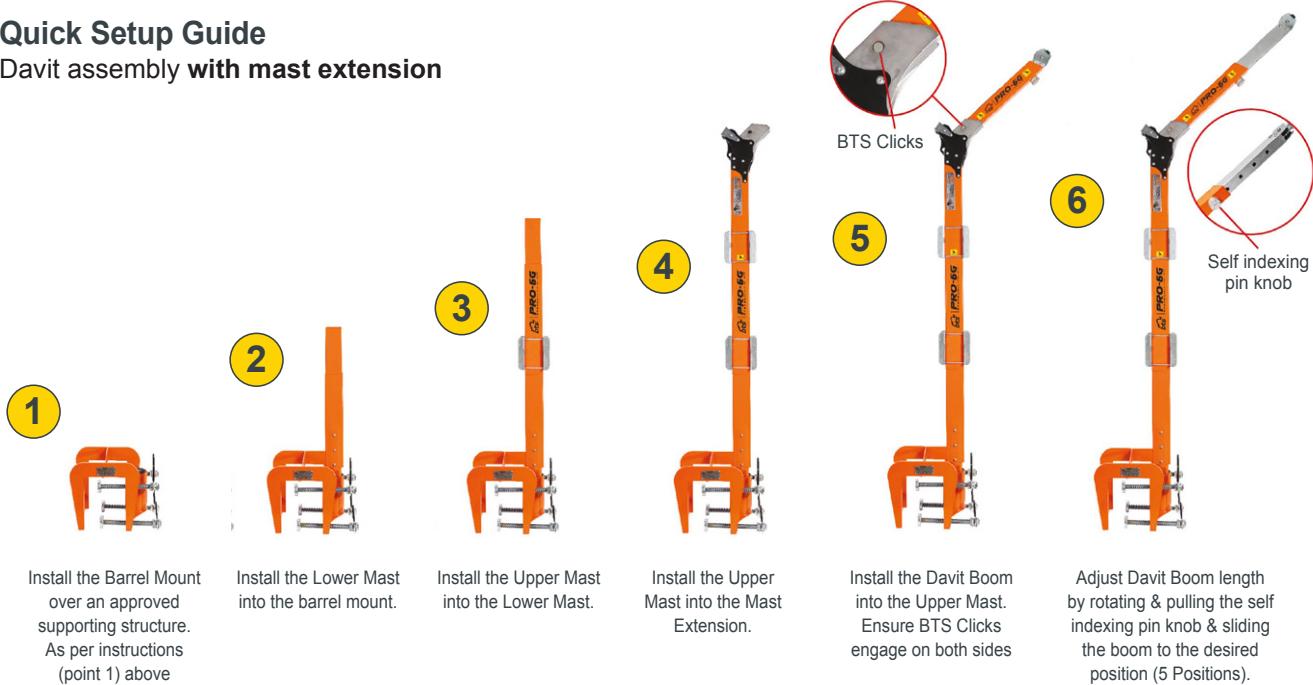


### Quick Setup Guide (continued)

Mounting the HRA

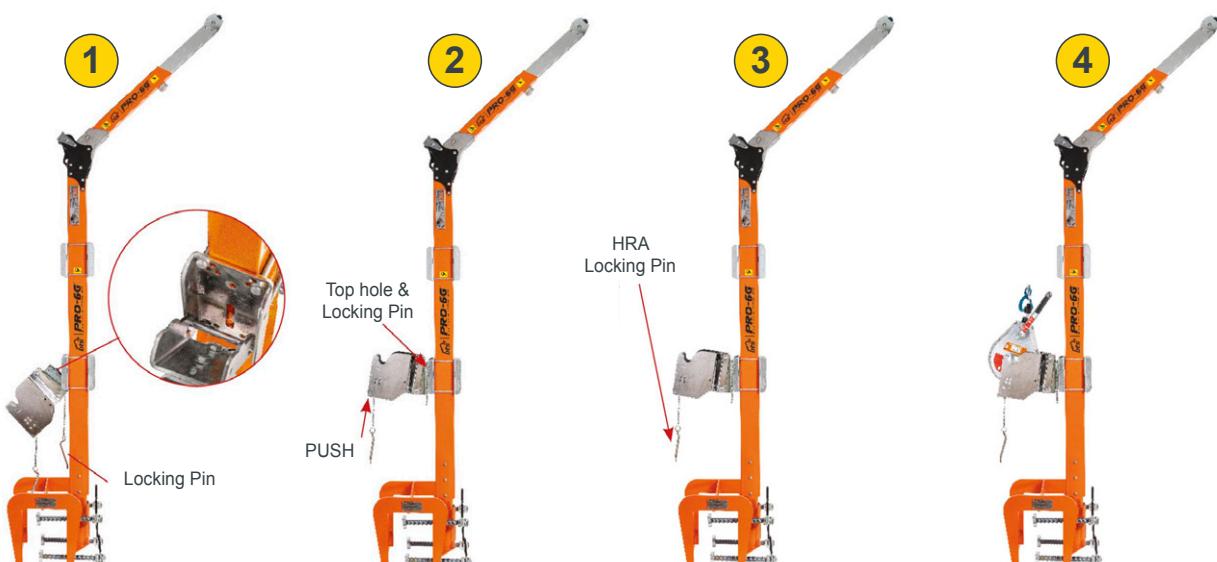

**TWF**

## ► Operating Manual

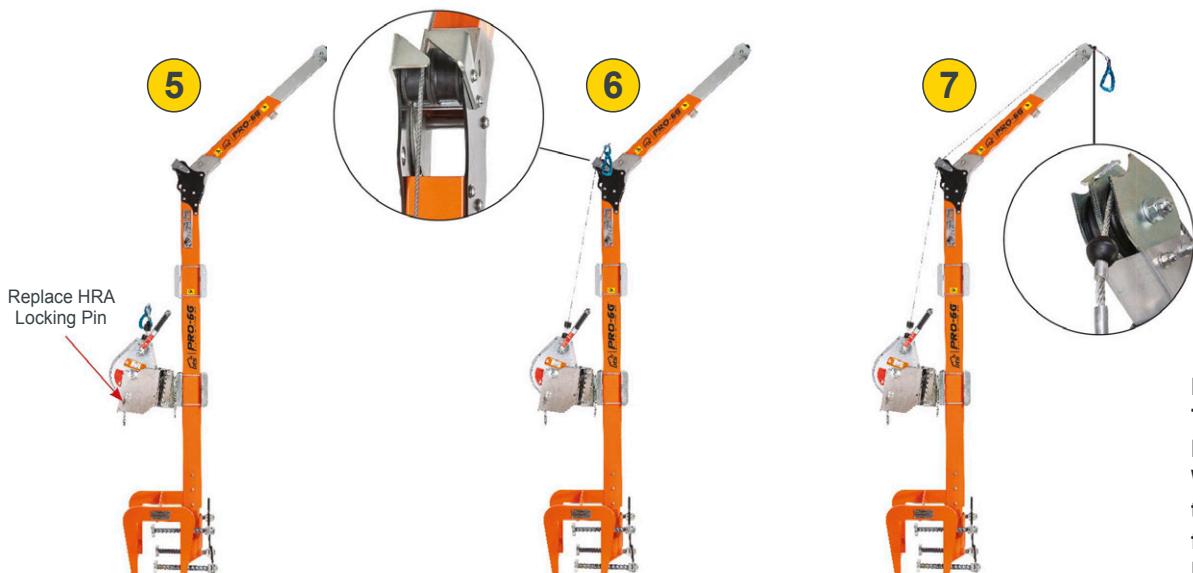

Line up hole in Rescue Recovery Winch hanger and Rescue Recovery Winch Davit Bracket and replace locking pin

Release enough cable to reach the bottom of the davit boom, then feed the cable through the guides and over the left or right rear cable roller, then continue to the boom tip cable guides and onto the roller as shown above.

Now feed the cable between the guides and over one of the boom tip cable rollers. Ensure that you use the same side roller as on the rear cable roller

**Note:**  
**The Rescue Recovery Winch is NOT to be used for Lifting or Lowering of materials. It is for personnel recovery only.**

### OPTIONAL


#### STAINLESS STEEL HAND BRAKE WINCH ASSEMBLY CODE: SSJG-C820

Stainless Steel Load Brake Winches Capacity: 140Kg (Lifting). COMPLIES WITH AS1418.2

#### Product features:


- Compact design.
- Stainless steel construction Grade 304.
- Automatic breaking system- no free wheeling under load.
- Fully enclosed gear train.
- Suitable for marine environments.
- Minimum handle effort to lift or pull W.L.L (Working Load Limit)
- 18m x 6mm 7x19 H.D.G Grade G2070 Wire rope
- C/w 6mm Grade 80 Eye Swivel Self Locking Hook
- Quick Release Single Universal Interface Bracket c/w togle pin & jack chain.

STAINLESS STEEL HAND BRAKE WINCH ASSEMBLY		
Part No.		BWT1800
Rated Capacity	Lifting	140 kg
Gear Ratio		5:1

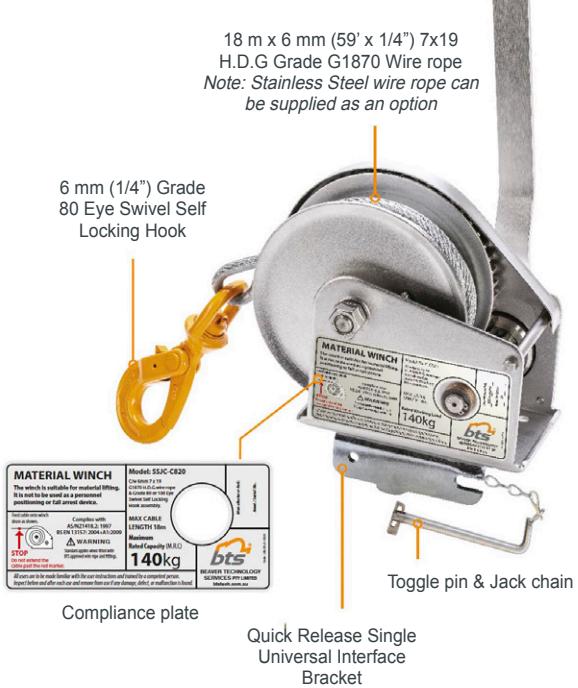

### ► PRO-6G TWF Shoring Kit

#### Quick Setup Guide Optional Materials Winch

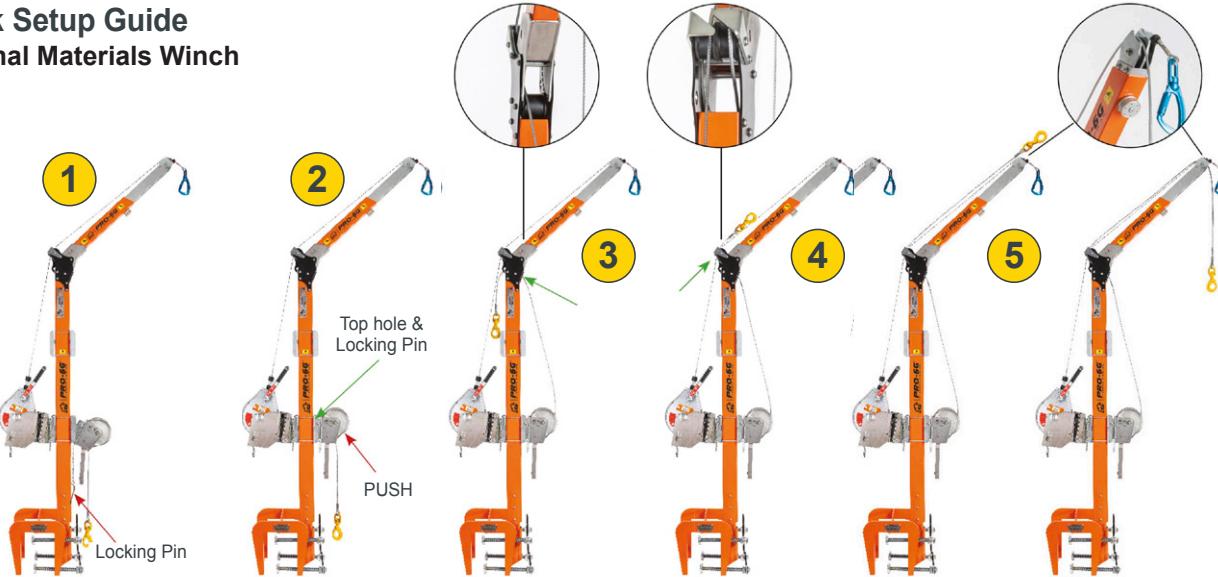

Install the Materials Winch onto the fixed Quick release bracket located on the inside of the davit. Ensure the bracket engages with the bar on the bottom of the bracket on the Davit

Lift Winch up, line up top holes & insert locking pin

Push the Materials Winch hook through the front mount redirect roller opening and locate the cable onto the roller.

Release enough cable to reach the top of the davit boom, then feed the cable through the guides and over the free rear cable roller, then continue to the boom tip cable guides and onto the free roller as shown above.

#### 5. Training

- All persons using this equipment must receive appropriate training from their employer on all equipment involved prior to operating. Users must also read and fully understand this manual and any other instruction manual(s) relating to the system being used, or have the instructions fully explained to them before using this equipment.
- Additionally, users must be properly trained in the use of any accessories that are to be used with the davit shoring kit, as well as fall protection, confined space safety and any other procedures that are applicable to the work being performed; in compliance with local regulations.

**Note:** Documented training records should be kept for all users of this equipment.

#### 6. System usage

- Before using the system, ensure that free space beneath the workplace/Davit is calculated to achieve minimum required clearance, so that, in case of a fall, there will be no collision with the ground or other obstacle in the fall path. This includes 1m clearance, limited fall arrest distance of the device used and stretch in the harness.

- Fit a full body harness (compliant to AS/NZS1891.1, EN361:2002) and ensure that the harness is fitted as per the manufacturer's instructions. Never use a harness that is not adjusted correctly as it does not provide adequate support in the event of a fall.
- Connect the HRA's/SRL's hook to the Dorsal Dee ring of the harness, if you cannot see that the connection has been done correctly, have another worker confirm that the hook is in the correct location and closed properly. Please read the operators manual for this item prior to use.
- Using winch to retrieve the personnel from the excavation. Please read Operator's instructions for the Winch provided by its manufacturer.

#### 7. Inspection and Maintenance

**The system must be inspected by a competent person before each use and periodically on a scheduled basis.**  
Any problems must be reported immediately to the supervisor and the equipment tagged "Out of Service" to prevent further use until it has been repaired.



## ► Operating Manual

### 7.1 Daily Inspection & Maintenance

- Inspect the system and all accessories for physical damage, bent parts etc. that may have been caused by an excavator or other plant on the job site. Check also for loose or missing hardware and missing or illegible labels (Refer to section 8 for Labels and Markings). Replacement labels and accessories for all TWF products are available from your equipment supplier.
- Inspect the pulleys on the Davit to ensure they are clean and rotate freely.
- Inspect the Davit fuse head to check if there are any signs of a fall or overload that might have occurred. Before each use ensure the following:
  - Extend and lock the Boom Extension Tube as described in Section 4.
  - Install a Winch, HRA or SRL on the structure as per the applicable instructions.
  - Pull with your full body weight on the lifeline and make sure there is no movement of the extension tube. If using a HRA or SRL, apply a sharp, steady pull on the lifeline to engage the SRL brakes and then pull on the lifeline to test the system.
- Barrel Mount base must be cleaned and inspected before each use. Check that all four clamping screws on the barrel mount base are secure and that the base is sitting level on top of the shoring.
- If used with a Winch, ensure the Winch bracket is secure to the Davit Post. Use Winch Operation/Inspection manual for its inspection and maintenance.
- If used with a HRA a visual inspection and functional test of the HRA fall arrest block must be performed before every use. To do so, attach the fall arrest block to a suitable anchor point: Pull the rope, the ratchets must lock audibly and the device must be locking. Firmly hold the rope and allow it to retract into the fall arrest block in a controlled manner. See the operators manual for further information

### 7.2 Annual Inspection & Maintenance

At least annually, the Kit needs to go through a detailed inspection by a competent person following the inspection procedure outlined in Section 7.1 and the results recorded in an Inspection Log (a sample log is provided on page 9).

**Note:** The inspection plate on the Davit needs to be marked with the date of inspection and date of next inspection.

### 7.3 Inspection of IKAR HRA Rescue / Retrieval Handle Wire Seal

The IKAR HRA (Rescue Retrieval Winch) has a Wire seal that prevents the handle from being used as a materials winch. If the seal is broken, it will indicate that a rescue has been performed with this HRA & that an incident report has been filled out and documented in the provided inspection log.



**Note:** The Rescue Recovery Winch is NOT to be used for Lifting or Lowering of materials. It is for personnel recovery only.


### 8. Packaging

For transportation or storage, ensure the system is disassembled and stored in the **Heavy Duty Storage Tool Box** provided with the kit.




## ► PRO-6G TWF Shoring Kit

## ■ 9. Labels & Markings

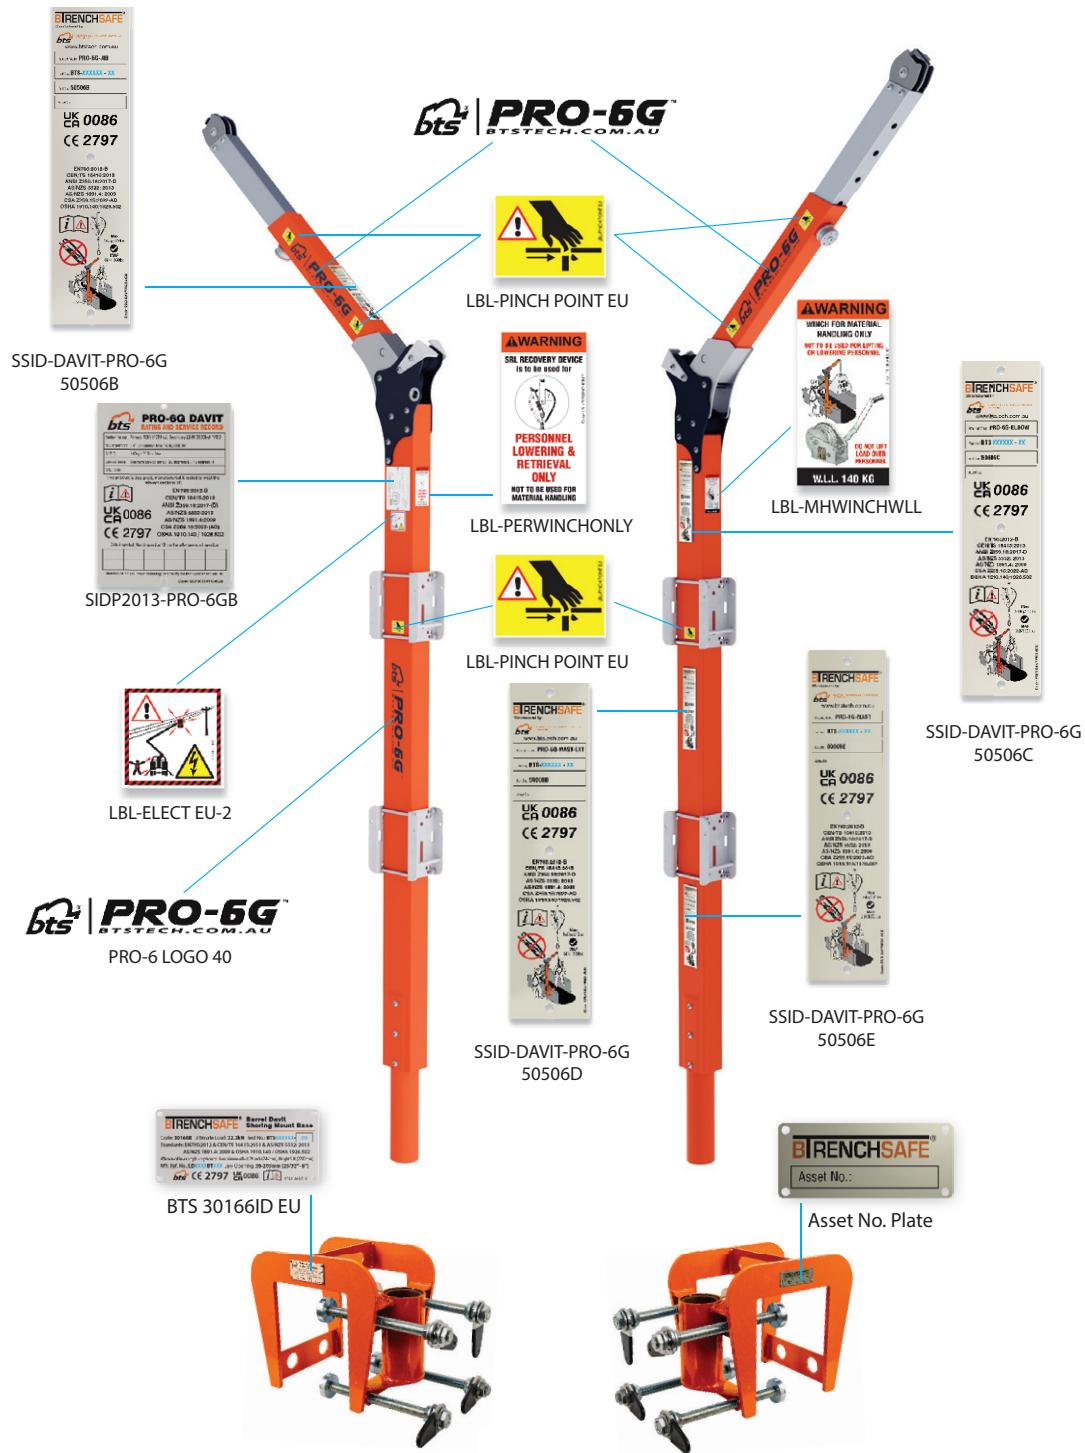



## ► Operating Manual

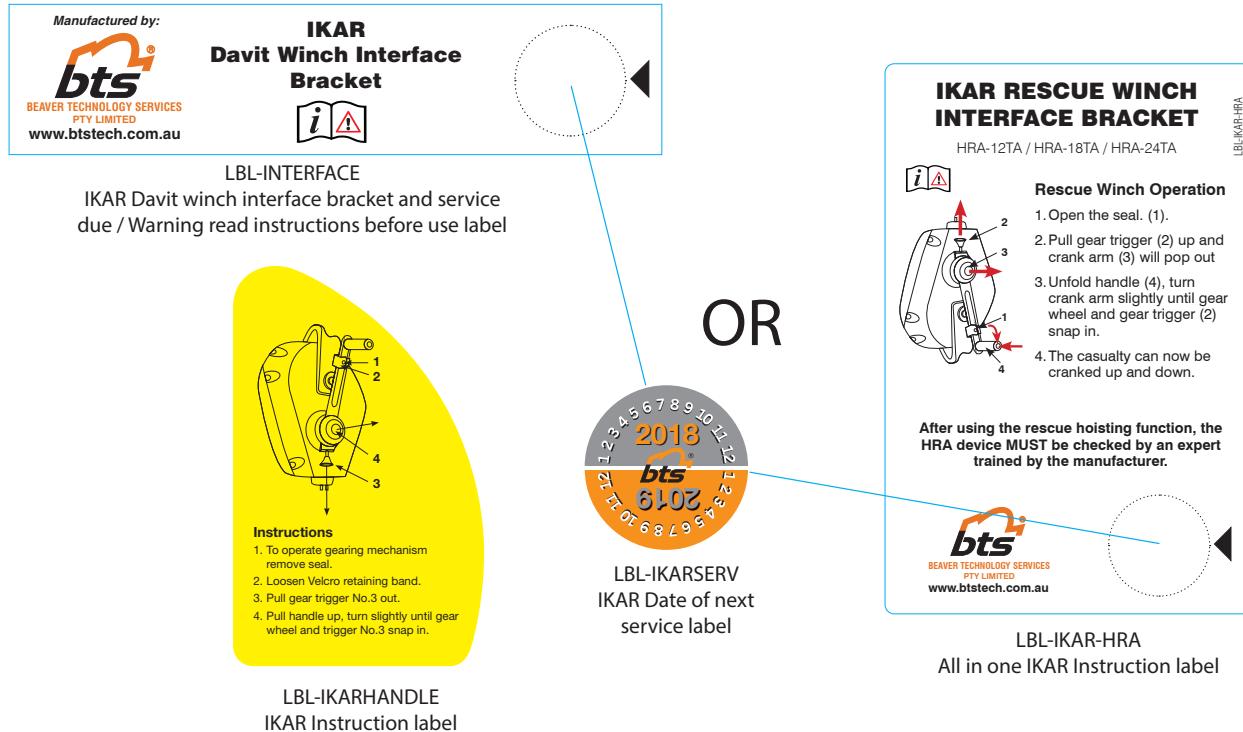

### 9.1 Labels & Markings explanation of pictograms used on labels

Users must read and fully understand the information booklet and any other instruction manuals relating to the system being used, or have the instructions fully explained to them before using this equipment. Failure to do so could result in serious or fatal injuries.

Tear web lanyards shall not be used on the jib.

The operator of the winch needs to be connected to the secondary anchor point on the mast using a type 3 SRL.



Working Load Limit: 1 person weighing a maximum of 140kg including all clothing, tools and equipment connected to the HRA / Winch.

Self Retracting Lifelines shall have a Maximum Arrest force of 6kN.



### ► PRO-6G TWF Shoring Kit



Danger! Beware of overhead powerlines that may cause electrocution.

LBL-ELECT EU



Warning! There is a risk of pinching or crushing in this location. Always wear gloves and beware of pinch points during installation and operation.

LBL-PINCHPOINT EU



Users must read and fully understand the information booklet and any other instruction manuals relating to the system being used, or have the instructions fully explained to them before using this equipment. Failure to do so could result in serious or fatal injuries.

#### WARNING

WINCH FOR MATERIAL HANDLING ONLY

NOT TO BE USED FOR LIFTING OR LOWERING PERSONNEL



W.L.L. 140 KG

LBL-MHWINCHWLL

Maximum Weight Load  
Limit that can be lifted with  
this equipment is 140kg.

#### WARNING

SRL RECOVERY DEVICE  
is to be used for



PERSONNEL  
LOWERING &  
RETRIEVAL  
ONLY

NOT TO BE USED FOR  
MATERIAL HANDLING

LBL-PERWINCHONLY

SRL Recovery device  
is to be used for  
PERSONNEL Lowering  
& Retrieval ONLY

## ■ 10. Productspecification

### PRO-6G Davit

Weight: 26 kg

Overall dimension: Height – 2167 mm & Width – 1110 mm

### BTRENCHSAFE® Steel Adjustable Barrel Davit Mount

Weight: 25.2 kg

Overall dimension: 376mm x 354mm x 265mm

### Packaging Dimension (Heavy Duty Carry Bag)

1200 mm x 450 mm x 550 mm

### Total Weight

85 kg

## ■ 11. Cleaning

The system must be clean and free of surface contaminants to work correctly.

Depending on the site conditions, the Pro-6G Davit system may need to be periodically cleaned to remove any built up dirt and debris that may have accumulated. Use a solution of warm water and mild detergent to clean the system.

Do not use solvents or other cleaners to clean the unit, as this may result in damage to the surface finish. If the equipment becomes wet, either from being in use or due to cleaning, it should be allowed to dry naturally or wiped down with a cloth. Do not use heat generating equipment to speed up the process of drying.





## ► Operating Manual

### ■ 12. Copy of EC declaration of Conformity

**bsi.**

#### EU Type Examination Certificate

This is to certify that:

Beaver Technology Services Pty Ltd  
Part of: Beaver Group  
142-146 Magowar Road  
Girraween  
New South Wales  
2145  
Australia

Holds Certificate Number:

CE 777634

In respect of: **Pro-6G Davit to EN 795:2012, Class B CEN/TS 16415:2013, Class B**  
on the basis that BSI carried out the relevant Type Examination procedures under the requirements with the  
Regulation (EU) 2016/425 of the European Parliament and Council relating to Personal Protective Equipment  
Regulation (PPE) Annex V (Module B) and meets the relevant health and safety requirements specified in Annex II

For and on behalf of BSI, a Notified  
Body for the above Regulation  
(Notified Body Number 2797):

First Issued: 2023-05-24  
Latest Issue: 2023-05-24  
Effective Date: 2023-05-24  
Expiry Date: 2028-05-23

Denelise L'Ecluse, Managing Director Assurance - Continental Europe

**Product Specification****Model: Pro-6G Davit****Product Description:**

The Pro-6G Davit is designed to be mounted on a shoring/trench (steel or aluminium) panel to provide reliable anchorage. It is used with the Barrel Davit mount. Type B anchor points.

**Technical Specification:**

EN 795:2012 Personal fall protection equipment – Anchor devices. Class B.

CEN/TS 16415:2013 Personal fall protection equipment – Anchor devices – Recommendations for anchor devices for use by more than one person simultaneously. Class B.

**Certificate Administration Details**

Technical File Reference: 'PRO-6 Davit BG-QA-EU-012'

**Certificate Administration Record and BSI internal Technical File Review reference**

Issue Date	Comments
May 2023	First issue

BSI Review Ref.  
2797:23:3749886

**Certificate validity**

The Certificate holder is responsible for ensuring that the Notified Body is advised of changes to any aspect of the overall processes utilised in the manufacture of the product, failure to do so could invalidate the Certificate in respect of product manufactured following the introduction of such changes.

**Monitoring of manufactured PPE**

The validity of the Certificate for the products is also dependent on the maintenance of the EU Conformity to Type Based on Quality Assurance of the Production Process, Annex VIII (Module D), as referenced on BSI issued Certificate CE 656222.

This certificate has been issued by and remains the property of BSI Group The Netherlands B.V., John M. Keynesplein 9, 1066 EP Amsterdam, The Netherlands and should be returned immediately upon request.

To check its validity telephone +31 20 3460780. An electronic certificate can be authenticated [online](#).

BSI Group The Netherlands B.V., registered in the Netherlands under number 33264284, at John M. Keynesplein 9, 1066 EP Amsterdam, The Netherlands  
A member of BSI Group of Companies.



## ► PRO-6G TWF Shoring Kit

### Notes



## ► Operating Manual

### TWF PRO-6G Davit Shoring Kit - Inspection Log

Product Model No.: ..... Date of Manufacture (dd/mm/yy): ..... / ..... / .....

Product Serial No.: ..... Purchase Date (dd/mm/yy): ..... / ..... / .....

INSPECTION ITEM	Inspection		DETAILS Location of damage	DISPOSITION / repaired / scrapped	APPROVED for USE by:
	pass	fail			
Check the kit - ensure it is free of dents, distortion, cracks, corrosion or other damage					
Inspect the pulley on Davit to ensure it is clean and rotates freely					
Inspect Davit arm and ensure the fuse head is properly engaged and there are no indications of fall or overload					
Ensure the off set adjustment arm open & close properly					
Inspect all bolts and nuts – ensure they are secure and none missing, substituted or altered					
Ensure all labels are secure and legible (refer to section 8)					
Inspect the system components (SRL, Winch, Karabiners, etc.)					

If inspection or operation reveals a defective condition, remove the Davit System from service immediately and contact an authorized service centre for repair.

Date of Inspection: .....

Inspected By: .....

Date of Next Inspection: .....

The information set out in this manual has been compiled from supplier reference data including third party sources. BTS believes that the information is accurate and reliable, though we do not make or give any warranty (other than implied by statute which may not be excluded) with respect to the information. By using this information, the user undertakes not to hold BTS liable or responsible in any way whatsoever in relation or consequential to such use.



# **TWF** TIEFBAUTECHNIK

Sales | Rental | Leasing



## **PRO-6G TWF RESCUE KIT**

**TWF Tiefbautechnik GmbH**  
Düsseldorfer Straße 2, D-52525 Heinsberg, Germany  
T: +49 2452 15678-0  
F: +49 2452 15678-19  
[office@twf-tiefbautechnik.de](mailto:office@twf-tiefbautechnik.de)  
[www.twf-tiefbautechnik.de](http://www.twf-tiefbautechnik.de)

**TWF International GmbH**  
Klingerstraße 8, A-1230 Wien  
T: +43 1 8653333  
F: +43 1 8653333-33  
[office@twf.at](mailto:office@twf.at)  
[www.twf.at](http://www.twf.at)

**OPERATING MANUAL**